

PORTER



Specifications

Type	
Engine Type	2.6L Euro II diesel natural aspirated
Bore x Stroke (mm)	91.1 x 100
Compression Ratio	22 : 1
Max Power ps/rpm	79 @ 4,000
Max Torque nm/rpm	167 @ 2,200
Valve System	Single overhead camshaft, 2 valves / cylinder
Fuel System	Min-Max type governor, bosch type injection pump
Fuel Type	Diesel
Fuel Tank (l)	65
Suspension	
Front	Double Wishbone & Torsion Bar with ø 25mm Stabilizer Bar
Rear	Semi-elliptic Laminated Leaf Springs
Load Capacity	
Front	4539 mm ²
Rear	1 Ton
Steering	
Type	Hydraulic Power Assisted (Rack and Pinion with Collapsible Universal Joint and Column)
Minimum Turning Radius (m)	5.3
Wheels & Tyres	
Wheel	Steel Rim 6.0J x 15"
Tyre (mm)	205 / 70 R15 C
Spare Tyres	Full Size Steel Rim
Brakes	
Front	ø 274 mm Ventilated disc
Rear	ø 260 mm Solid Drum
Load Sensing Proportioning Valve	Standard
Brake Booster	8 + 9" Tandem
Drivetrain	
Transmission	5 Speed Manual

- The above values are results from internal testing and are subject to change after validation.
- Some of the equipment illustrated or described in this catalog may not be supplied as standard equipment and may be available at extra cost.
- Hyundai Nishat Motor (Private) Limited reserves the right to change specifications and equipment without prior notice.
- The color plates shown may vary slightly from the actual colors due to the limitations of the printing process.
- Please consult your dealer for full information and availability on colors and trims.



Hood



Efficient Gauge Cluster Design



AM/FM/BT/AUX/USB Audio System



Rear Flat High Deck



Roomy Interior



Naturally Aspirated 2.6L Diesel Engine




Power Window Controls




Room Lamp + Sunglass Holder

Applications

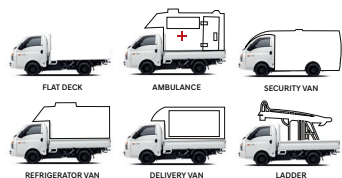

Dimensions

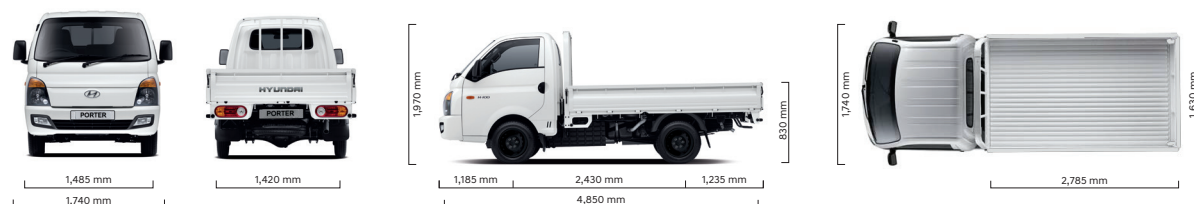

* Above dimensions are based on standard cab extra-long wheel base pictured here

